




LG VX6100 Keypad Replacement

This guide will explain how to remove and replace the keypad.

Written By: Teal

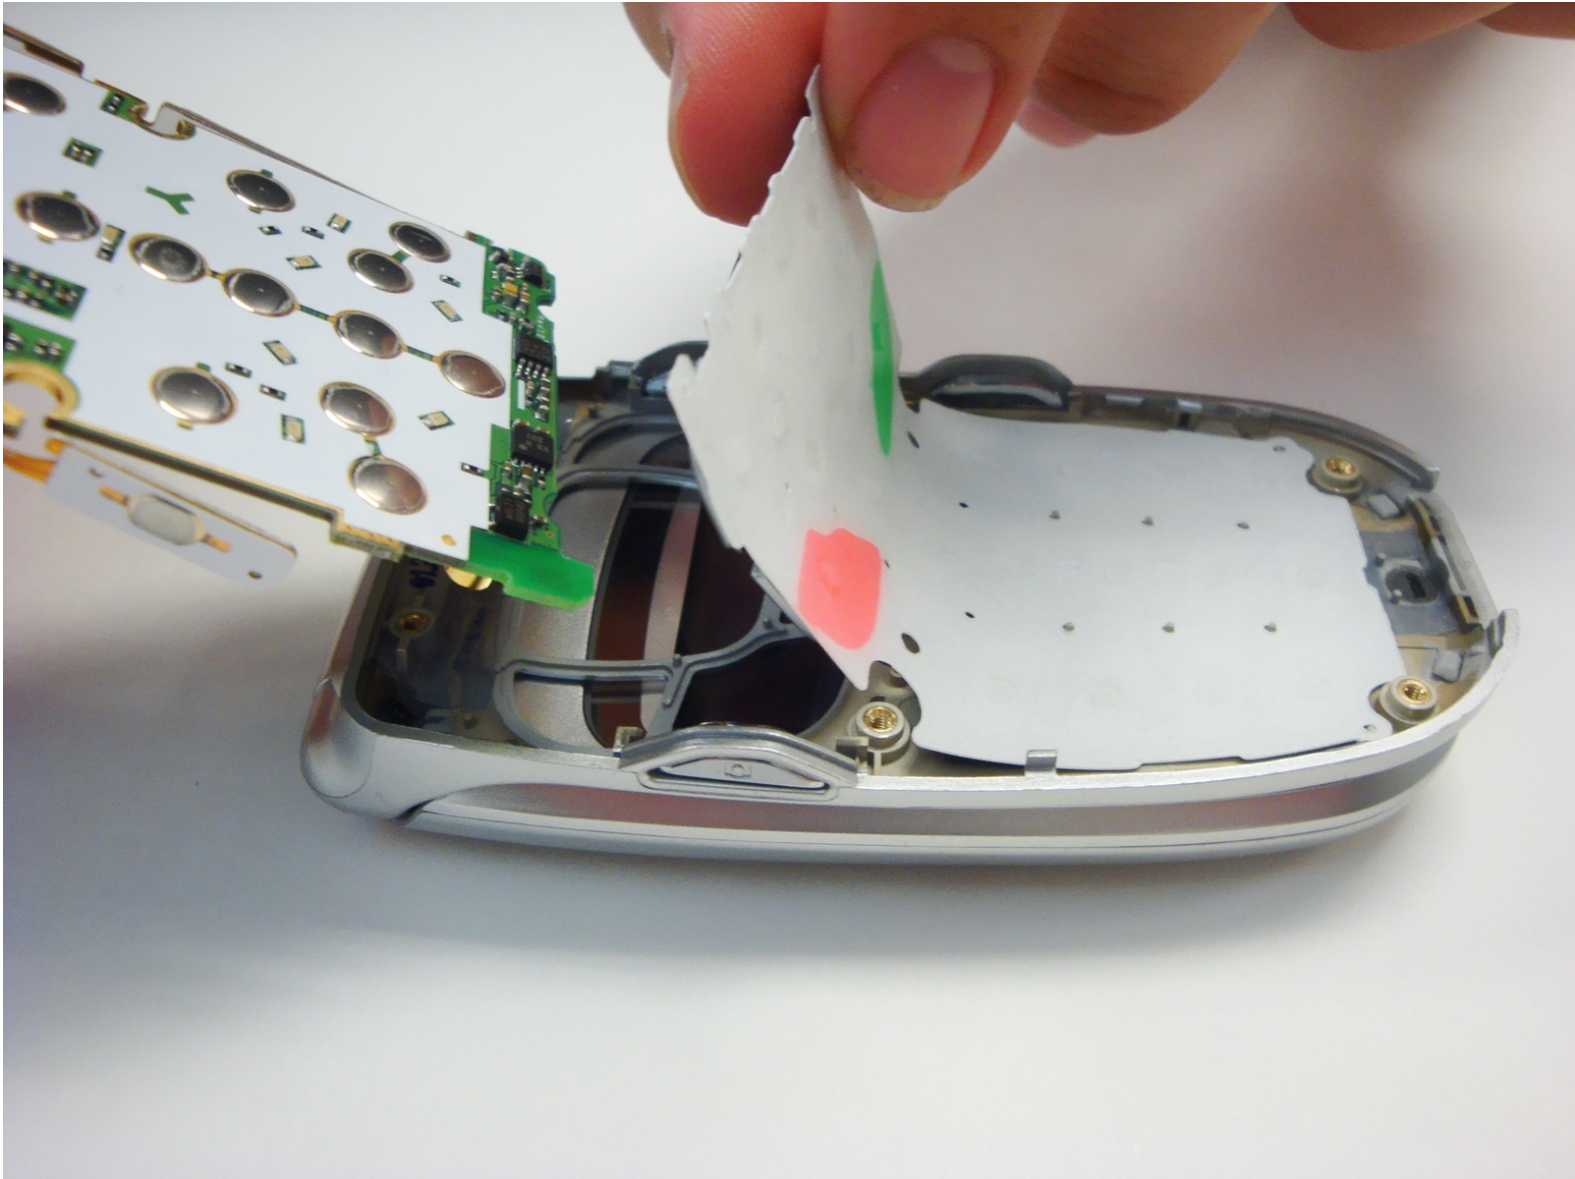



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Backcase



- Push down on the gray "PUSH" button on the back side of the phone.
- Slide the back case downward. Then, lift and remove the case.

Step 2



- Lift up on the battery to remove it from the case.

Step 3





- Locate two gray plugs as indicated. Using a push-pin or tweezers, pry both of these plugs out.

Step 4




- Use a Phillips #00 screwdriver to unscrew the six screws as indicated.

Step 5

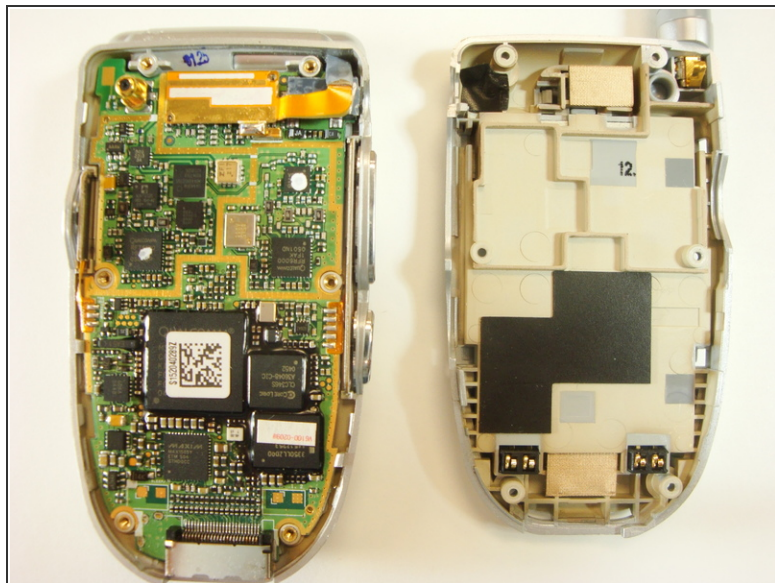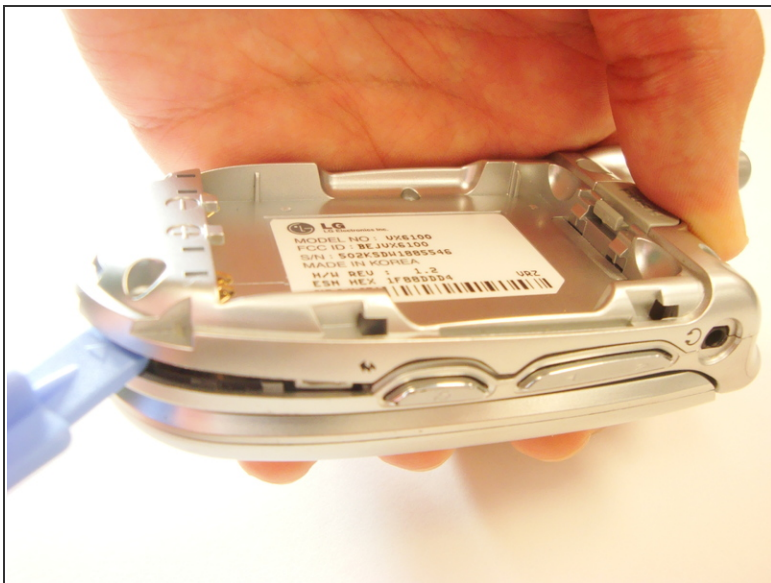


- Insert a plastic opener tool through the seam between the back case and the rest of the phone.
- Slowly slide the tool along the seam. Lift up on the back case while you do this until the back case comes apart.

Step 6 — Keypad

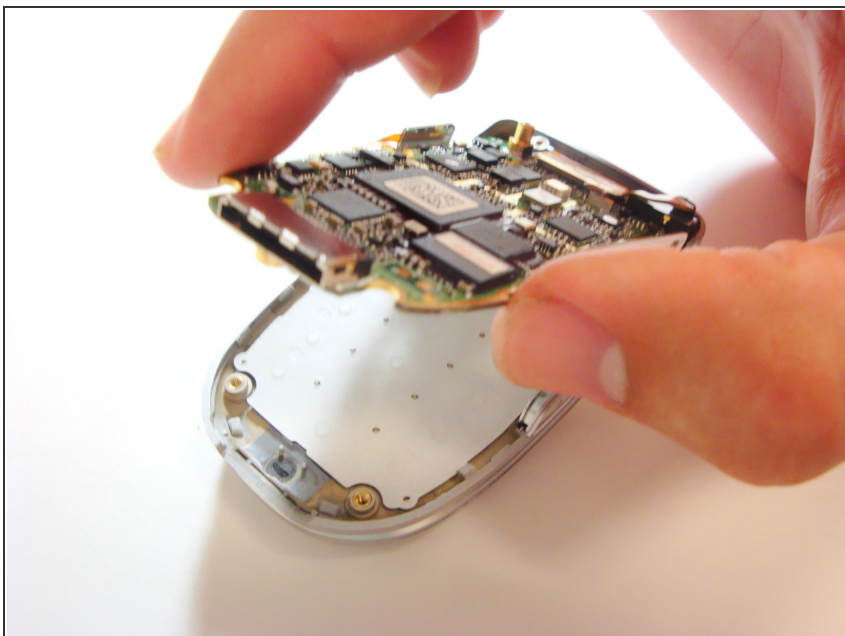

- Lift the bottom of the logic board out of the case.
- ⚠ Make sure not to lift the top of the logic board, since it is still connected to the backcase of the phone.

Step 7

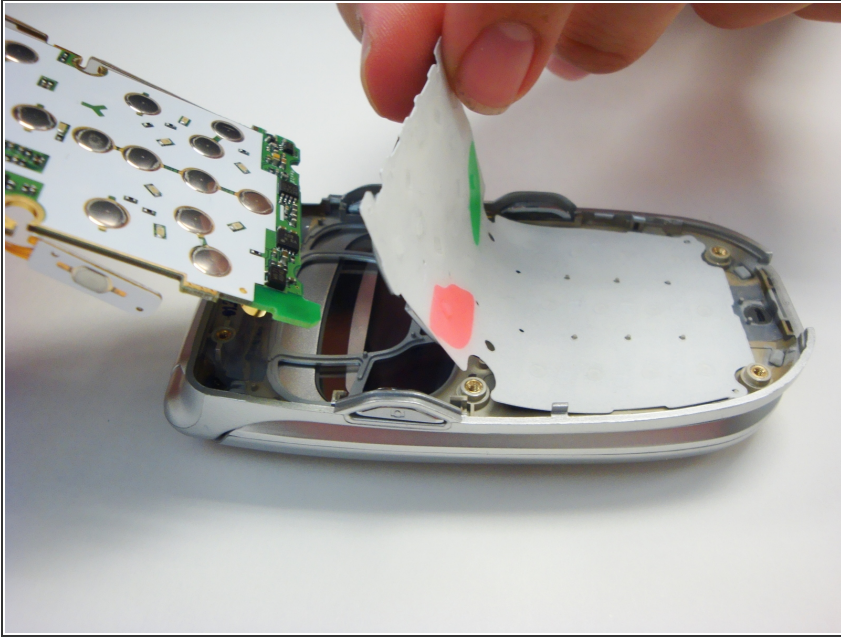

- Slide your finger on any edge of the white keypad until it lifts up and remove the keypad from the phone case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-02 07:22:25 AM.